


RS ELCOF 38/38RM S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

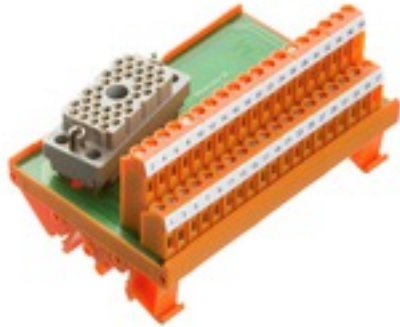

Similar to illustration

ELCO contacts inserts are used in electrical power plants, refineries and a variety of process applications – wherever stable and reliable signal transmission is required. The ELCO connector features both a reliable connection system and a high signal capacity.

The line of RS ELCO interfaces and pre-assembled PAC ELCO cables is a specially designed solution for these requirements.

General ordering data

Version	Interface, RS ELCO, ELCO plug-in connector, 38, LP2N 5.08mm
Order No.	1480760000
Type	RS ELCOF 38/38RM S
GTIN (EAN)	4050118289619
Qty.	1 pc(s).

Creation date March 24, 2021 1:14:47 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RS ELCOF 38/38RM S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Height	60 mm	Height (inches)	2.362 inch
Length	105 mm	Length (inches)	4.134 inch
Net weight	870.875 g	Width	70 mm
Width (inches)	2.756 inch		

Temperatures

Storage temperature	-40...60 °C	Operating temperature	-25...50 °C
---------------------	-------------	-----------------------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Connection Data

Connection (field side)	LP2N 5.08mm	Connection on control side	ELCO plug-in connector
Connector alignment	Right	Contact material (control side)	Phosphor bronze alloy
Earthing	No	Number of poles (control side)	38-pole female
Polarity hardware codification	1		

Rating data

Rated voltage	150 V AC / 200 V DC	Rated current per connection	1.5 A
Total operating current	57 A		

Insulation coordination (EN50178)

According to	DIN EN 50178	Rated insulation voltage	< 150 V AC
Surge voltage category	II	Pollution severity level	2
Pulse voltage test (1,2/50µs)	2.5 kV	Insulation test voltage	0.8 kVAC

Connection field

Clamping range, max.	6 mm ²	Clamping range, min.	0.13 mm ²
Flexible with sleeve, max.	2.5 mm ²	Flexible with sleeve, min.	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Max. wire cross-section, AWG	AWG 26	Min. wire cross-section, AWG	AWG 12
Sleeve with plastic collar, max.	2.5 mm ²	Solid, max. H05(07) V-U	6 mm ²
Solid, min. H05(07) V-U	0.5 mm ²	Stripping length	6 mm
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Type of connection	Clamping yoke connection		

Classifications

ETIM 6.0	EC002780	ETIM 7.0	EC002780
ECLASS 9.0	27-14-11-52	ECLASS 9.1	27-14-11-52
ECLASS 10.0	27-14-11-52	ECLASS 11.0	27-14-11-52

Approvals

Approvals



Creation date March 24, 2021 1:14:47 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

2

Data sheet

RS ELCOF 38/38RM S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
User Documentation	Table of connections

Data sheet

RS ELCOF 38/38RM S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

